




## LIGHT DUTY EARTH INSPECTION HOUSINGS

Regards de visite légers



The light duty earth inspection housing has a maximum safe working load of 2,000 kilograms. It is UV stabilised against degradation by sunlight and non-brittle to prevent cold weather damage. The unique, detachable easy-locking lid ensures security of equipment as the locking mechanism can only be operated by the special key provided with the housing. The base has built-in slots for locating earth bars. Its light weight feature allows easy handling, storage and transportation. The termination depth is increased 100% by simply locking two units together, allowing deeper earth.

*Le regard de visite léger peut supporter jusqu'à 2 kgs. Il est doté d'une protection UV contre le soleil et non fragile contre les dégradations du temps. Le couvercle facilement verrouillable assure la sécurité de l'équipement étant donné que le mécanisme de fermeture peut être seulement actionné avec une clé spéciale fournie avec le regard.*

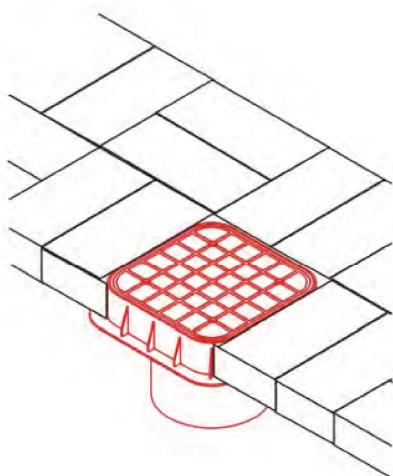

Couleur couvercle	D mm	H mm	L1XW1 mm	Poids unitaire kg	Nombre par pack	Référence
Lid Colour	D mm	H mm	L1XW1 mm	Unit Weight Kg	Pack Quantity	Part Number
grey	180	200	245X245	1.75	1	ARJDG 201

